


FLOAT ACCUMULATORS

SPECIAL PRODUCTS AND ACCESSORIES

Float accumulators are ideal for low-cycle applications requiring extreme temperatures or located in a harsh environment. Our patented technology minimizes most major causes for operational damage such as fluid contamination and insufficient maintenance. Float accumulators are particularly well-suited for subsea and offshore applications. Unlike other types of accumulators, float accumulators must be mounted vertically to function properly.

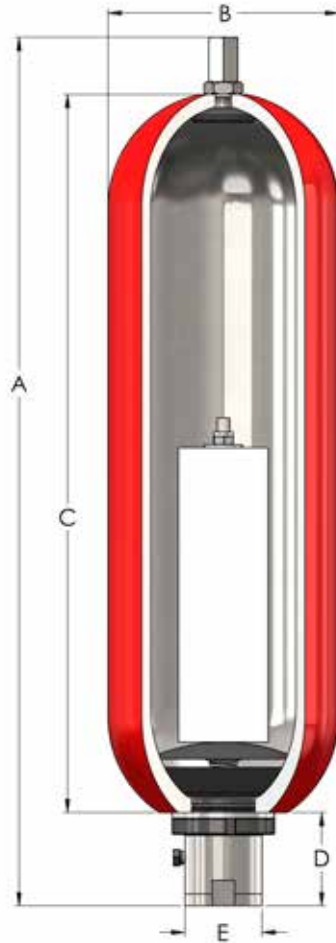

| 3000 PSI FLOAT ACCUMULATORS | | | | | | | | | |
|-----------------------------|--------------------|-------------------------------|------------------|-----|------|-----|-----|---------------|-----------|
| PART NUMBER | NOMINAL SIZE (GAL) | GAS VOLUME (IN ³) | DIMENSIONS (IN.) | | | | | WEIGHT (LBS.) | STD. PORT |
| | | | A | B | C | D | E | | |
| A10F3100XS | 10 | 2013 | 54.0 | 9.0 | 48.5 | 3.5 | 3.0 | 220 | 2" NPT |
| A11F3100XS | 11 | 2267 | 60.0 | 9.0 | 54.0 | 3.5 | 3.0 | 232 | 2" NPT |
| A15F3100XS | 15 | 2960 | 78.0 | 9.0 | 72.0 | 3.5 | 3.0 | 304 | 2" NPT |

| 6000 PSI FLOAT ACCUMULATORS | | | | | | | | | |
|-----------------------------|--------------------|-------------------------------|------------------|-----|------|-----|-----|---------------|-----------|
| PART NUMBER | NOMINAL SIZE (GAL) | GAS VOLUME (IN ³) | DIMENSIONS (IN.) | | | | | WEIGHT (LBS.) | STD. PORT |
| | | | A | B | C | D | E | | |
| A10F6100XS | 10 | 2013 | 55.0 | 9.6 | 48.5 | 3.9 | 3.0 | 316 | 2" NPT |
| A15F6100XS | 15 | 2960 | 79.0 | 9.6 | 72.0 | 3.9 | 3.0 | 476 | 2" NPT |

Items are only available in XS, with stainless parts and special shell coatings, for improved corrosion resistance. Other fluid ports available, see page 5.