


# HIGH-FLOW BLADDER ACCUMULATORS

2.5 - 15 GAL 3000 PSI

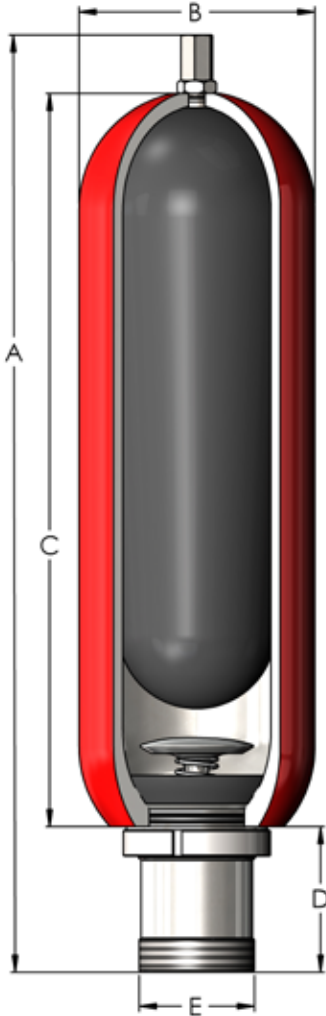

Designed for applications that require a fluid transfer rate of 200-600 GPM.

## 3000 PSI MODELS

| PART      | TOP REPAIRABLE | NOMINAL SIZE (GAL) | GAS VOLUME (IN <sup>3</sup> ) | DIMENSIONS (IN.) |     |      |     |     | WEIGHT (LBS.) | WEIGHT (TR) |
|-----------|----------------|--------------------|-------------------------------|------------------|-----|------|-----|-----|---------------|-------------|
|           |                |                    |                               | A                | B   | C    | D   | E   |               |             |
| A2.5H3100 | A2.5HT3100     | 2.5                | 522                           | 24.0             | 9.0 | 16.0 | 5.6 | 4.4 | 78            | 80          |
| A5H3100   | A5HT3100       | 5                  | 1092                          | 36.0             | 9.0 | 28.0 | 5.6 | 4.4 | 118           | 120         |
| A10H3100  | A10HT3100      | 10                 | 2087                          | 57.0             | 9.0 | 49.0 | 5.6 | 4.4 | 214           | 216         |
| A11H3100  | A11HT3100      | 11                 | 2345                          | 63.0             | 9.0 | 55.0 | 5.6 | 4.4 | 230           | 232         |
| A15H3100  | A15HT3100      | 15                 | 3208                          | 81.0             | 9.0 | 73.0 | 5.6 | 4.4 | 296           | 298         |

## FLUID PORT OPTIONS



## STANDARD HIGH-FLOW FLUID PORT OPTIONS

|     |                                              |
|-----|----------------------------------------------|
| Std | 4" -8 Male NPT                               |
| -3  | 4-1/4" -8 UN-2 Male SAE                      |
| -5  | 4-1/4" -8 UN-2 Male SAE, 9/16" -18 SAE Bleed |
| -9  | 4" -8 Male NPT, 1/4" -18 NPT bleed           |